




GENERATION N-TYPE M10

## BAUER SOLARTECHNIK **PREMIUM PROTECT** BS-144M10HBW-GG 570 - 580 W

BIFACIAL GLASS-GLASS HALF-CELL MODULE - TRANSPARENT

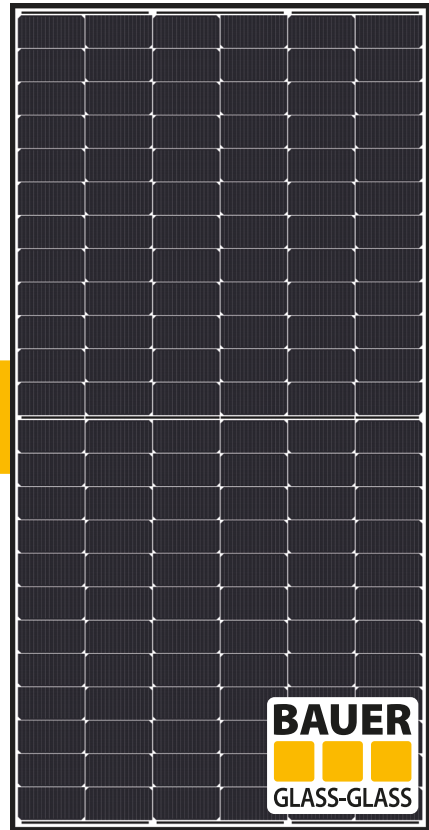


Sample

engineered & designed in  
**GERMANY**



BAUER guarantees a minimum performance value of 87,4% after 30 years for the **PREMIUM PROTECT** glass-glass solar modules.

A comparison of **BAUER** glass-glass solar modules performance guarantee to conventional glass-foil modules according to industry standards:

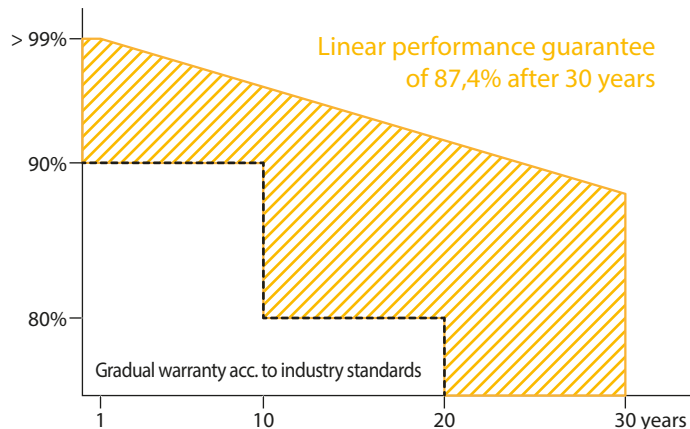

### FIRE CLASS A

Maximum fire protection through double glazing according to the highest security requirements



### CERTIFICATION

Constant in-house quality controls - certified several times over by accredited inspection bodies



### N-TYPE BIFACIAL HALF-CELLS

Up to 30% increase in yield through bifacial cells active on both sides and a transparent backside



### GERMAN GUARANTOR

If necessary, it is guaranteed that a German company takes over any claim settlements



### PERFORMANCE GUARANTEE


30 year warranty and a linear performance guarantee over a period of 30 years



### REINSURANCE COVERAGE

BAUER is reinsured for 25 years of the product's performance guarantee


DISTRIBUTION

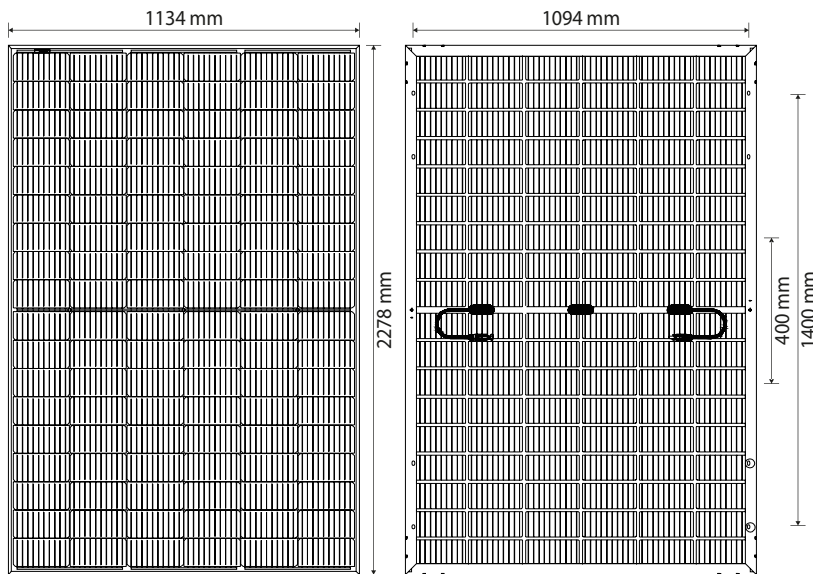

### BAUER SOLARTECHNIK

## PREMIUM PROTECT

### BS-144M10HBW-GG 570 - 580 W

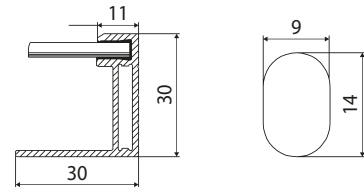

#### WARRANTIES<sup>1</sup>

- 30 years product warranty
- 30 years performance guarantee

#### PHYSICAL SPECIFICATIONS

Module dimensions	2278 x 1134 x 30 mm
Weight	32 kg
Frame	Black anodized aluminium profile
Frontside	AR-coating Semi-toughened glass, 2 mm
Embedding material	EVA
Backside	White coated semi-toughened glass, 2 mm
Solar cells	144 monocrystalline N-type bifacial half-cells
Bifaciality	80 % ± 10 %
Junction box(es)	IP68, 3 bypass diodes
Cable & connector	1x4 mm <sup>2</sup> , 1300 mm, MC4 compatible

#### OPERATING CONDITIONS

Operating temperature	-40 to 85°C
Static load	5400 Pa (snow/wind)
Hail	Ø 25 mm at 23 m/s

#### CERTIFICATION

IEC 61215, IEC 61730, fire class A acc. IEC 61730-2

#### PACKAGING

Modules per pallet	36
Pallets/modules per truck	20/720

#### ELECTRICAL CHARACTERISTICS<sup>2</sup>

		BS-570-144M10HBW-GG	BS-575-144M10HBW-GG	BS-580-144M10HBW-GG
Maximum power	P <sub>max</sub> (W)	570	575	580
Power output tolerance	P <sub>max</sub> (%)	0 ~ +3	0 ~ +3	0 ~ +3
Open circuit voltage	V <sub>oc</sub> (V)	51,59	51,79	51,99
Short circuit current	I <sub>sc</sub> (A)	13,90	13,96	14,02
Voltage at maximum power	V <sub>mpp</sub> (V)	43,06	43,25	43,43
Current at maximum power	I <sub>mpp</sub> (A)	13,26	13,32	13,38
Module efficiency	η <sub>m</sub> (%)	22,07	22,26	22,45
Bifaciality performance increase*	10 % P <sub>mpp</sub> (W)	627 (+57)	633 (+58)	638 (+58)
	20 % P <sub>mpp</sub> (W)	684 (+114)	690 (+115)	696 (+116)
	30 % P <sub>mpp</sub> (W)	741 (+171)	748 (+173)	754 (+174)
Nominal operating cell temperature	NOCT (°C)	45 +/- 2		
Temperature coefficient of Voc	T <sub>k</sub> (Voc)	-0,26 %/°C		
Temperature coefficient of I <sub>sc</sub>	T <sub>k</sub> (I <sub>sc</sub> )	+0,038 %/°C		
Temperature coefficient of P <sub>mpp</sub>	T <sub>k</sub> (P <sub>mpp</sub> )	-0,31 %/°C		
Maximum system voltage DC (TÜV)	(V)	1500		
Maximum series fuse rating	(A)	30		

\*depending on Albedo and irradiation conditions at installation site

<sup>1</sup>Nominal value is specified in the written warranty conditions. A possible light-induced degradation in performance is not taken into account. <sup>2</sup>Values under Standard Test Conditions (STC): air mass 1,5 AM, irradiance 1000 W/m<sup>2</sup>, cell temperature 25°C. STC measuring tolerance: ±3 % (P<sub>max</sub>), ±10 % (V<sub>max</sub>, I<sub>mpp</sub>, Voc, I<sub>sc</sub>). The beneficiary under the reinsurance policy is solely Bauer Solar GmbH. Please contact us to get information on how this insurance coverage benefits you as a customer. Note: please read the safety instructions and installation manual before using this product. Subject to change. © 2023 Bauer Solar GmbH. Effective: 04/04/23.

#### DISTRIBUTION